

What's in the Box?

PART NO.	QTY	DESCRIPTION
RK-DVX2U-A-TX4S		Powered Rack/Chassis with DVI/Audio/USB CAT6 Transmitter, 4 Card Package. Includes: [RK-DVX2U-TX4 and CCPWR06]
RK-DVX2U-A-TX8S		Powered Rack/Chassis with DVI/Audio/USB CAT6 Transmitter, 8 Card Package. Includes: [RK-DVX2U-A-TX8 and CCPWR06]

Technical Specifications*

VIDEO	
Format	DVI-D Single Line
Maximum Pixel Clock	165 MHz
Input Interface (TX)	8 x (2) DVI-D 29-pin female
Output Interface (RX)	(2) DVI-D 29-pin female
Resolution	Up to 1920 x 1200 @60Hz
DDC	5 volts p-p(TTL)
Input Equalization	Automatic
Input Cable Length	Up to 20 ft.
Output Cable Length	Up to 20 ft.
AUDIO	
Frequency Response	20 Hz to 20 KHz
Impedance	600 ohm
Nominal Level	0-1.0 V
Common Mode	Rejection at 60dB
Input Interface	(1) 3.5 mm Stereo Audio
Output Interface	(1) 3.5 mm Stereo Audio
USB	
Signal Type	USB 1.1 (Fully Transparent)
Input Interface (TX)	8 x (1) USB Type B (Female)
Output Interface (RX)	(4) USB Type A (Female)
OTHER	
Power	Internal 110-240 VAC
Dimensions	17 in W x 8.5 in H x 3.25 in D
Weight	10 lb
Operating Temp.	0-55 °C (32-131°F)
Storage Temp.	-20-85 °C (-4-185 °F)
Humidity	Up to 95%

*specifications shown are for the 8-Port option

© Copyright 2012 SmartAVI, All Rights Reserved

NOTICE

The information contained in this document is subject to change without notice. SmartAVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

SmartAVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language without prior written consent from SmartAVI.

For more information, visit www.smartavi.com.



Installation Manual

RK-DVX2U-A 8-Port Dual DVI-D, Audio and USB 1.1 Extender over STP



8-Port Dual DVI-D, Audio and USB 1.1 Extender up to 225 feet over STP Cable



SmartAVI, Inc. / Twitter: smartavi
11651 Vanowen St. North Hollywood, CA 91605
Tel: (818) 503-6200 Fax: (818) 503-6208
<http://www.SmartAVI.com>

www.smartavi.com

Introduction


The RK-DVX2U-A is the perfect solution for extending dual DVI-D displays, Audio and USB 1.1 devices to a remote location up to 225 feet away. It is the ideal way to consolidate up to 8 workstation computers into one location. The RK-DVX2U-A features dual DVI-D extension up to 225 feet over STP. It is fully compatible with MAC, PC and LINUX DVI standards. The RK-DVX2U-A features transparent USB 1.1 signal extension, with full support for all USB 1.1 devices and an integrated 4-port hub in the receiver. Flash Drives, Printers, Cameras, Scanners, etc. may all be used with the RK-DVX2U-A. The RK-DVX2U-A is designed to work in conjunction with the DVX2P-RX receiver unit. Up to 8 receivers may be used with the RK-DVX2U-A, depending on the application.

Features

- Supports up to 2 DVI-D single-link sources
- Supports Mac, PC, and Linux DVI
- Supports High Resolution 1920x1200 60Hz WUXGA
- Distance: 225 feet with four CAT6 STP cables
- Uses universal DVI Single Link connectors
- Zero pixel loss with TMDS signal correction
- DDC from internal table for Mac/PC
- Supports all USB 1.1 Devices Transparently (Flash Drives, Printers, etc.)
- Supports USB 1.1 keyboard and mouse
- Compatible with all operating systems
- Compatible with all major KVM switches
- Rack Mountable Solution
- Data recovery for digital video
- Supports 1.5 and 12Mbps data rates
- Plug-and-play

Applications

- Medical Applications
- Industrial Work Areas
- Home Theater Integration
- Digital Signage Deployment
- Information Kiosks/Displays
- Film/Recording Studios

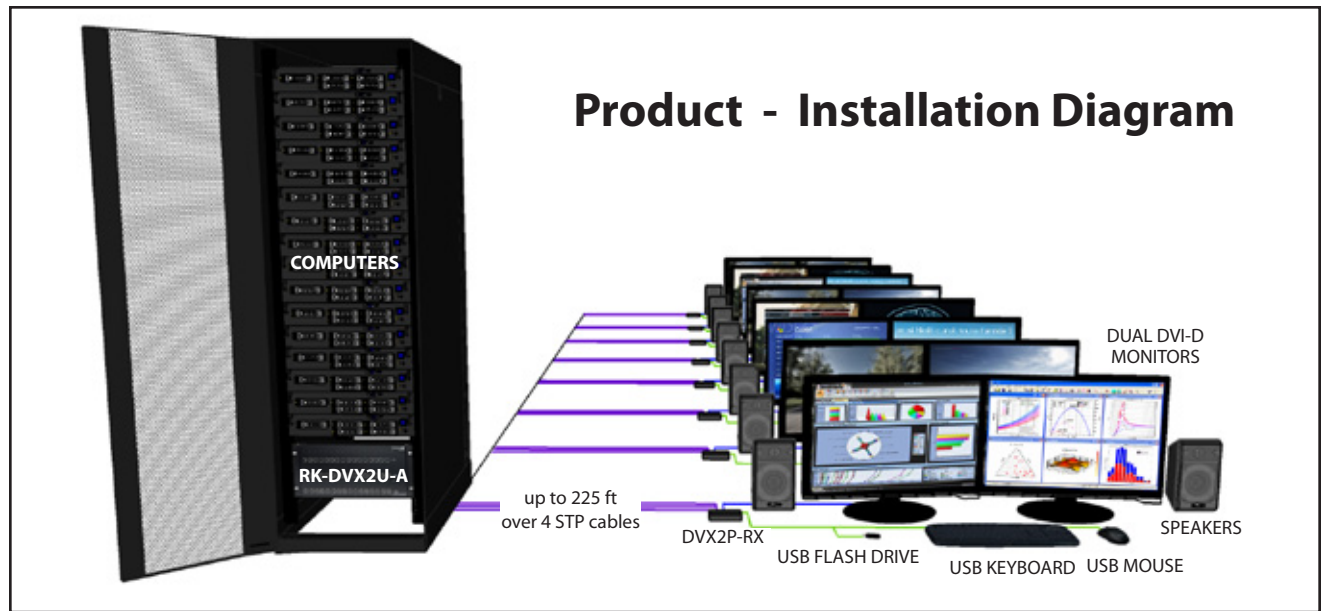


Connecting the RK-DVX2U

1. Power off all devices.
2. Connect two DVI-D sources (computer) to each of the 8 DVI-D ports on the rear of the RK-DVX2U-TX labeled and .
3. Connect an audio source to each of the 8 audio ports on the rear of the the RK-DVX2U-TX labeled).
4. Connect two USB sources to each of the 8 USB ports on the rear of the the RK-DVX2U-TX labeled .
5. Connect the RK-DVX2U-TX to the the DVX2P-RX with four STP (Sheilded Twisted Pair) cables using each the front ports labeled and the rear ports labeled .
6. Connect a DVI monitor to the ports on the rear of the DVX2P-RX labeled and .
7. Connect an audio device to the port on the DVX2P-RX labeled .

8. Connect up to 4 USB 1.1 devices to the ports on the DVX2P-RX labeled .
9. Connect the power to the ports labeled **POWER 110-240V** on the RK-DVX2U-TX and on the DVX2P-RX.
10. Power on the computers, displays and USB 1.1 devices.

The following is the wiring standard for terminating UTP/STP cable using RJ-45 connector:

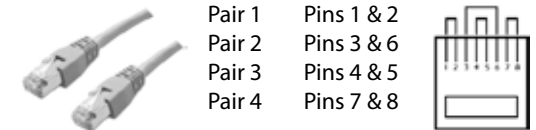

Connectors: RJ-45
 Capacitance: 14 pf/ft (46.2 pf/m)
 Conductor Gauge: 24 AWG
 Impedance: 100 +/- 15 ohms