HDR 4x2-Pro 4K/2K Resolution 4X2 HDMI Matrix Switch

The HDR 4x2-Pro delivers 4K/2K resolution while switching four signals between two displays

FEATURES

- Supports 4K/2K Input/Output
- 4x2 non-blocking, single-link HDMI matrix switch
- Distributes any of the four inputs to any combination of the two HDMI output displays
- Includes IR remote
- HDCP and HDMI I.4 Compliant

APPLICATIONS

- Wall Displays
- Digital Media
- Airports
- Dealer Rooms
- Control Rooms
- Audio/Visual Presentations
- Shopping Centers
- Security
- Point-of-Sale
- Hotels/Resort










OVERVIEW

To distribute and switch the latest in 4K/2K HDMI video signals, the HDR 4x2-Pro allows users to switch four HDMI inputs with two high-definition displays. Two outputs give users flexibility while routing HD audio and video signals with two displays. The HDR 4x2-Pro eliminates the need to disconnect and reconnect HDMI sources to a single display. The device is compatible with computer sources, live HD television feeds, Blu-ray players, gaming consoles, video cameras and more. Controlling the matrix switch is simple thanks to the front tactile buttons and the included infrared remote control.

APPLICATION DIAGRAM

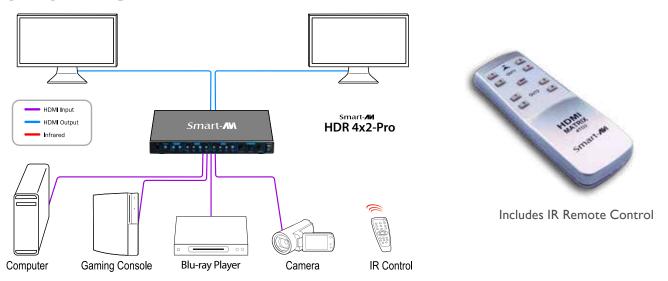

SPECIFICATIONS



HDR 4x2-Pro Front

VIDEO	
Format	HDMI 4K/2K
DVI Compliance	Single-link DVI-D 1.1 with Adapter
HDCP Compliance	1.0/1.1
Video Bandwidth	Single-link 340MHz [10.2Gbps]
Resolution	Up to 4K (3840x2160)
Input Interface	(4) HDMI[7.1ch audio & video]
Output Interface	(2) HDMI[7.1ch audio & video]
Connector	Type A[19-pin female]
Maximum Distance	25 ft.



HDR 4x2-Pro Rear

CONTROL	
Front Panel	Tact Switch
IR	Via Remote Control with IR Type 3
OTHER	
Power	External 100-240 VAC/5VDC2A @10W
Dimensions	7.75W x .75H x 3.625D in
Weight	0.8 lbs.
Approvals	UL, CE, ROHS Compliant
Operating Temp.	32-131°F (0-55 °C)
Storage Temp.	-4-185 °F (-20-85 °C)
Humidity	Up to 95%

ORDERING INFORMATION	
Part No.	Description
HDR4X2PROS	4K/2K HDMI 4x2 Router with IR Remote, Includes: [HDR4X2PRO]

