

## Technical Specifications

SX-200 Specifications	
Signal	Analog signal: Red, Green, Blue 0.7 V p-p 75 Ohms
Resolution/ Distance	640x480 1000ft; 800x600 850ft; 1024x768 700ft; 1200x1024 600ft; 1600x1200 560ft.
Sync	Horizontal and Vertical TTL compatible
Bandwidth	300 MHz
Keyboard	Standard PS/2 Compatible
Mouse	Standard PS/2 Compatible
Audio	Stereo Unbalanced 3.5mm jack socket
Power	5VDC 2A
Physical	
Dimensions W x D x H	109x166x30mm (4.29x6.54x1.18in)
Weight	.57 kg ( 1.26lb)
Enclosure Material	Aluminum

© Copyright 2004 Smart-AVI, All Rights Reserved

### Notice

The information contained in this document is subject to change without notice. Smart-AVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

Smart-AVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language without prior written consent from Smart-AVI.

For the complete manual, visit [www.smartavi.com](http://www.smartavi.com).

# Smart-AVI

Smart Audio Video Integration

## Quick Start Guide

### SX-200



**Uses a single CAT5 to extend  
Keyboard, Mouse, Video and Audio  
to a remote location up to 500 ft.**

### Smart-AVI

11651 Vanowen ST.  
North Hollywood, CA 91605  
Phone: (818) 503-6200  
Facsimile: (818) 503-6208

[www.smartavi.com](http://www.smartavi.com)

## Introduction

The SX-200 is a combination of transmitter and receiver devices designed to allow access to the PC from a keyboard, mouse, and monitor at a remote location up to 500 ft. away. The extension is accomplished over a single CAT5 cable.

## Features

- Provides remote access to the PC with keyboard, mouse and monitor.
- Uses a single CAT-5 UTP cable to reduce installation costs.
- Extends signal to a maximum distance of 500ft.
- Supports all PC/AT and PS/2 keyboards with full emulation.
- Caps Lock, Num Lock, and Scroll Lock are automatically saved and restored.
- Supports full emulation and conversion on all PC/AT and PS/2 mice.
- Compatible with Windows, NT, OS/2, UNIX, Linux, and other operating systems.
- Supports computer monitors with resolution of up to 1600x1200.
- Offers adjustable cable compensation.
- Compact metal enclosure.
- Supports stereo audio.

## What's in the box?

### SX-200


Please check the contents of the package before beginning installation.

SX-200 Package Content		
Qty	Description	Part Number
1	SX-200 Transmitter	SX-TX200
1	SX-200 Receiver	SX-RX200
2	1Power Supply	PS-5D2A-US
1	KVM Cable	CC-KVMMM-06

Optional Accessories		
1	3.5mm Stereo Audio Cable	CC-MMAMM-06

## Installation Diagram

Before you power up, ensure that all cables are properly connected as shown in the diagram below.

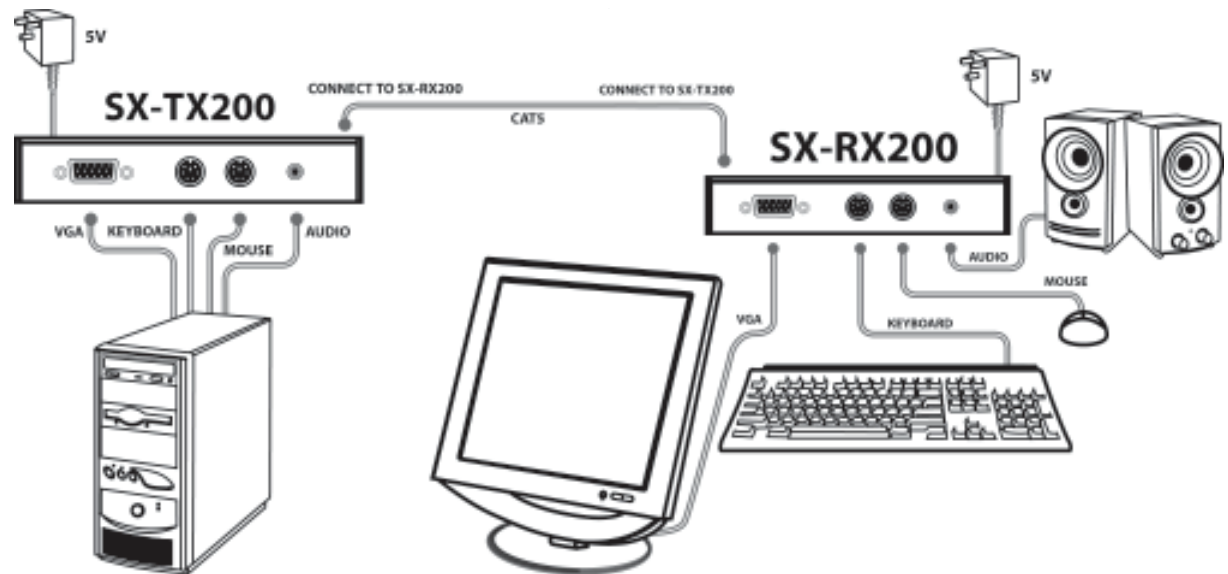

## Installation Instructions

### System Power Up

1. Connect the 5 Volt power supply to the transmitter
2. Turn the system on by plugging in the power adapter, if it is not yet connected.
3. Power up your computer.
4. Observe to see if both transmitter and receiver power LEDs are ON, and computer has finished the boot up process.
5. Observe monitor at receiver end to see if signal is going through.

## Quickstart

1. Connect the video out, keyboard and mouse ports on your computer to the transmitter using the supplied KVM and audio cables.
3. Connect a power adapter to the transmitter and the receiver.
4. Connect a CAT5 cable to the transmitter and run it over to the receiver.
5. Connect peripherals to the receiver. I.E. keyboard, mouse, monitor, and optional serial device.
6. Once everything is connected power up your computer and the SX-200 units.