

# VS2P

## 2-PORT VIDEO WUXGA SPLITTER



## 2-Port Video WUXGA Splitter

Send One VGA Signal to Two Displays

The VS2P is a 2-port video WUXGA splitter that allows a computer to display VGA video on two monitors simultaneously.

- Split WUXGA video signal into two outputs
- Resolutions up to 1600x1200 @ 85Hz and up to 2048x1536 @ 60Hz
- Easy installation
- 300 MHz Bandwidth
- Compact metal enclosure




Made in the USA

**Smart-AVI**  
SMART AUDIO VIDEO INNOVATION

[www.smartavi.com](http://www.smartavi.com)

# SPECIFICATIONS

## Application Diagram

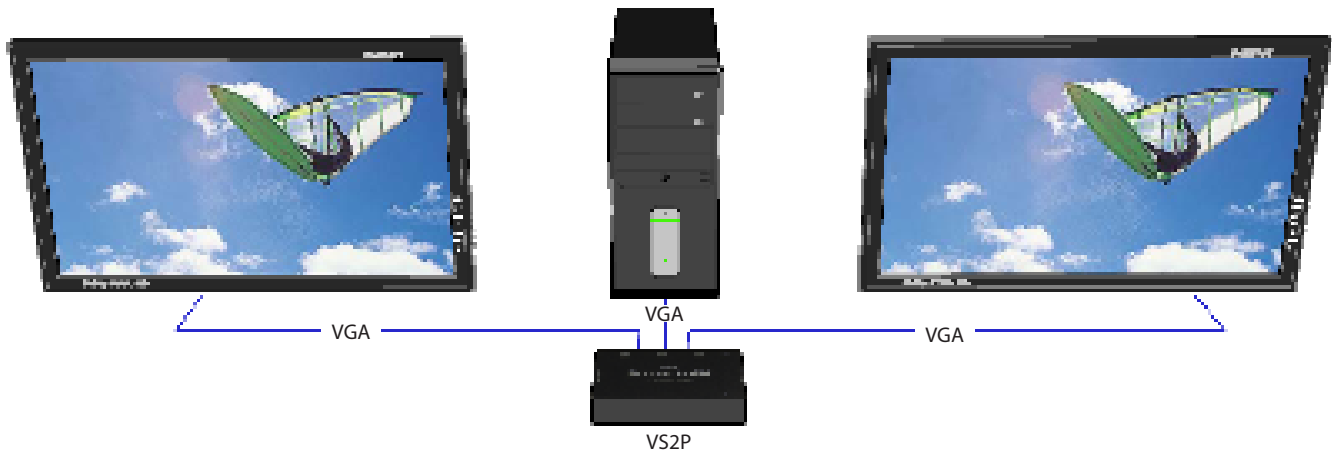

VIDEO	
Format	VGA RGB Analog (75Ω, 0.7Vp-p)
Resolution	Up to 1600x1200 @ 85Hz 2048x1536 @ 60Hz
Input Interface	(2) HD-15 Female
Output Interface	(1) HD-15 Male
H Frequency Range	30-95KHz
V Frequency Range	50-180Hz

OTHER	
DDC Signal	5 Volts [peak-to-peak], TTL
TDMS Signal	1.2 Volts[peak-to-peak], TTL
Power	External 5VDC2A
Dimensions	5.375"W x 1"H x 3.625"D
Weight	0.25 lbs.
Approvals	Device: CE, ROHS Power Supply: C-UL US, CE



ORDERING INFORMATION	
Part No.	Description
VS2PS	WUXGA 2-Port Splitter. Includes: [VS2P and PS5VDC2A]

Many leading companies have recognized and embraced the innovation of SmartAVI's technologies and have successfully incorporated them into their organizations. Clients of SmartAVI include:



SmartAVI, Inc. / Twitter: smartavi - 11651 Vanowen St. North Hollywood, CA 91605  
Tel: (818) 503-6200 Fax: (818) 503-6208 - <http://www.SmartAVI.com>

**Smart-AVI**  
SMART AUDIO VIDEO INNOVATION

  
Made in the USA

[www.smartavi.com](http://www.smartavi.com)