

TECHNICAL SPECIFICATION

VIDEO	
Format	HDMI 2.0
Video Resolution	Up to 3840 x 2160 @ 30 Hz
Video Bandwidth	Single-link 340 MHz (10.2 Gbps)
Input Interface (TX)	(1) HDMI 19-pin
Output Interface (RX)	(1) HDMI 19-pin
Max Output Distance	Up to 20 ft
Equalization	Automatic
Input TMDS Signal	1.2 Volts [peak-to-peak]
Input DDC Signal	5 Volts [peak-to-peak, TTL]
Data Rate	1.65 Gbps per color
AUDIO	
Format	Stereo
Input Interface (TX)	(1) 3.5mm (Female)
Output Interface (RX)	(1) 3.5mm (Female)
USB	
Input Interface (TX)	(1) USB Type A
Output Interface (RX)	(2) USB 1.1 Type A for KM Devices; (2) USB 2.0 Type A Transparent
Keyboard and mouse	Keyboard and mouse emulation
SYSTEM	
Cable Requirements	CAT5/5e/6
Maximum Length	100 m (330 ft)
OTHER	
Power	100-240 VAC/ 5VDC @ 3A/15W
Dimensions	7.8" W x 1.15" H x 3.65" D
Weight	1 lb (.5 lbs per unit)
Approvals	UL, CE, ROHS Compliant
Operating Temp.	+32 to +104 °F (0 to +40 °C)
Operating Humidity	20% to 80% (non condensing)
Storage Temp.	-4 to 140 °F (-20 to +60 °C)
Storage Humidity	Up to 95% (No Condensation)
Compliance EMC	FCC (Class A), CE (Class A), ICES-003
Compliance	RoHS2 (CE)
Support Warranty	1-year

WHAT'S IN THE BOX

PART NO.	Q-TY	DESCRIPTION
HDX-LT-TX	1	HDMI, USB 2.0, Audio, CAT5/5e/6 Transmitter
HDX-LT-RX	1	HDMI, USB 2.0, Audio, CAT5/5e/6 Receiver
PS5VD3A-WLLMNT	2	PS5VD3A Power Supply
Quick Start Guide	1	

NOTICE

The information contained in this document is subject to change without notice. SmartAVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for particular purpose.

SmartAVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced, or translated into another language without prior written consent from SmartAVI Technologies, Inc.



888.994.7427, 702.800.0005

2455 W Cheyenne Ave, Suite 112
North Las Vegas, NV 89032

SmartAVI.com

Smart-AVI
SMART AUDIO VIDEO INNOVATION

HDX-LT

HDMI, USB 2.0 AND AUDIO KVM CAT5/6 EXTENDER



**EXTEND DIGITAL VIDEO
HDMI 4K@30HZ, USB 2.0,
USB KEYBOARD/MOUSE
AND AUDIO
UP TO 100 M (330 FT)
OVER A SINGLE CAT5/6**

Quick Start Guide

ABOUT HDX-LT

The HDX-LT is a Single Head HDMI (3840 x 2160 @ 30 Hz), USB 2.0, USB keyboard-mouse and stereo audio extender, sending signals up to 100 m (330 ft) away over a single conventional and inexpensive CAT5/5e/6 cable. This new technology is superior to older HDMI extenders that require a special CAT6 shielded cable to go a short distance.

The HDX-LT is the first extender on the market to feature 3840 x 2160 @ 30 Hz, USB 2.0 and full KVM extension on one cohesive system and is optimized for Full HD monitors with crystal-clear picture; excellent for detail driven work.


The HDX-LT extends keyboard-mouse signals for remote workflow management and offers uninterrupted emulation from the user's transmitter unit. This uninterrupted emulation prevents accidental disconnection or deactivation issues during mission critical operations. The HDX-LT's unparalleled KVM extension technology makes it the perfect solution for extending servers in applications ranging from data processing to interactive conferencing.

FEATURES

- Extends HDMI up to 100 m (330 ft) from the source
- Supports up to 3840 x 2160 digital video resolution @ 30 Hz
- Automatic DDC Learning
- USB Keyboard and Mouse extension
- External power adapter for transmitter and receiver unit
- Supports Stereo Sound
- Compatible with Windows, Mac and Linux Operating Systems
- Transparent USB 2.0 extension

HARDWARE INSTALLATION

1. Ensure that power is turned off or disconnected from the unit and the computers.
2. Use a HDMI cable to connect the HDMI output port from a computer to the HDMI IN port of the transmitter.
3. Use a USB cable (Type-A to Type-B) to connect a USB port on the computer to the respective USB port of the transmitter.
4. Optionally connect a stereo audio cable (3.5mm to 3.5mm) to connect the audio output of the computer to the AUDIO IN port of the transmitter.
5. Connect the transmitter and receiver to each other using a CAT5/5e/6 cable.
6. Connect a monitor to the HDMI OUT console port of the receiver using a HDMI cable.
7. Connect a USB keyboard and mouse to the two USB console ports of the receiver.
8. Optionally connect peripheral USB devices, such as a printer or a camera to the other two USB console ports of the receiver.
9. Optionally connect stereo speakers to the AUDIO OUT port of the receiver.
10. Finally, power on the transmitter and receiver by connecting a 5VDC power supply to the power connector, and then turn on the computer.

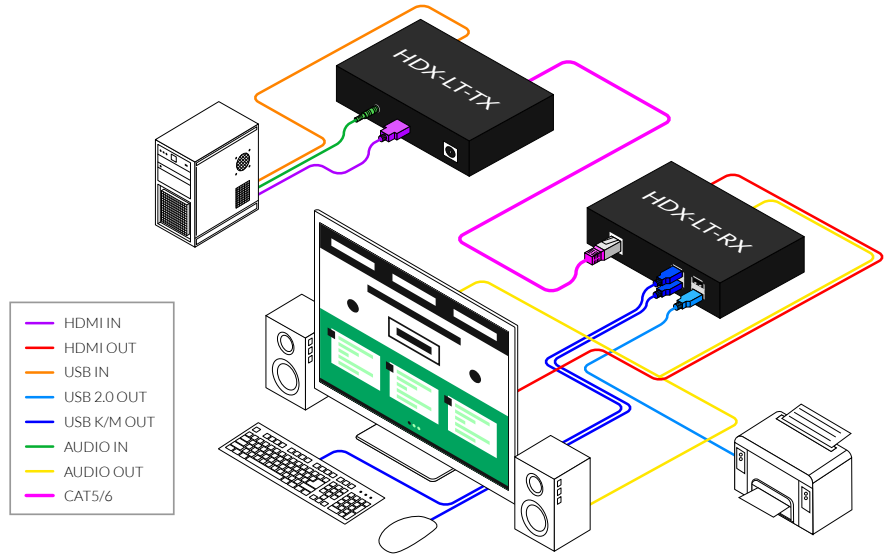

HDX-LT-TX Front



HDX-LT-RX Front



HDX-LT-TX Back



HDX-LT-RX Back